





Charging



Charge Before First Use

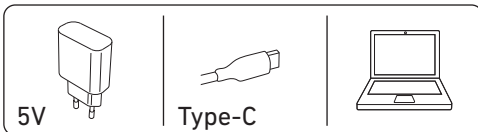


0°C~40°C

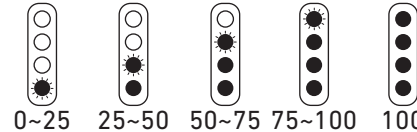


HF6R




Battery Status

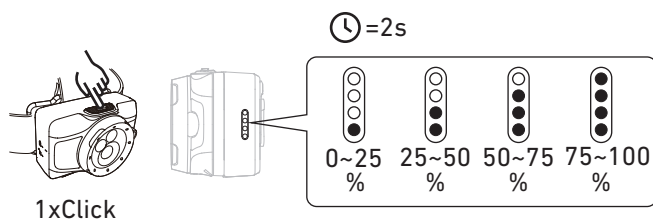



Adaptive Light Beam

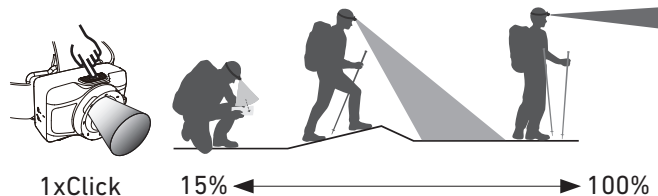


Ledlenser Connecting System Adapter

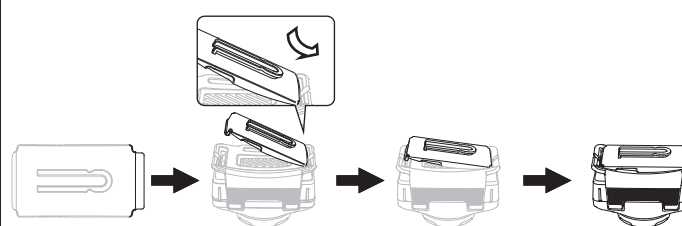


HF6R RGB





Transportation Lock

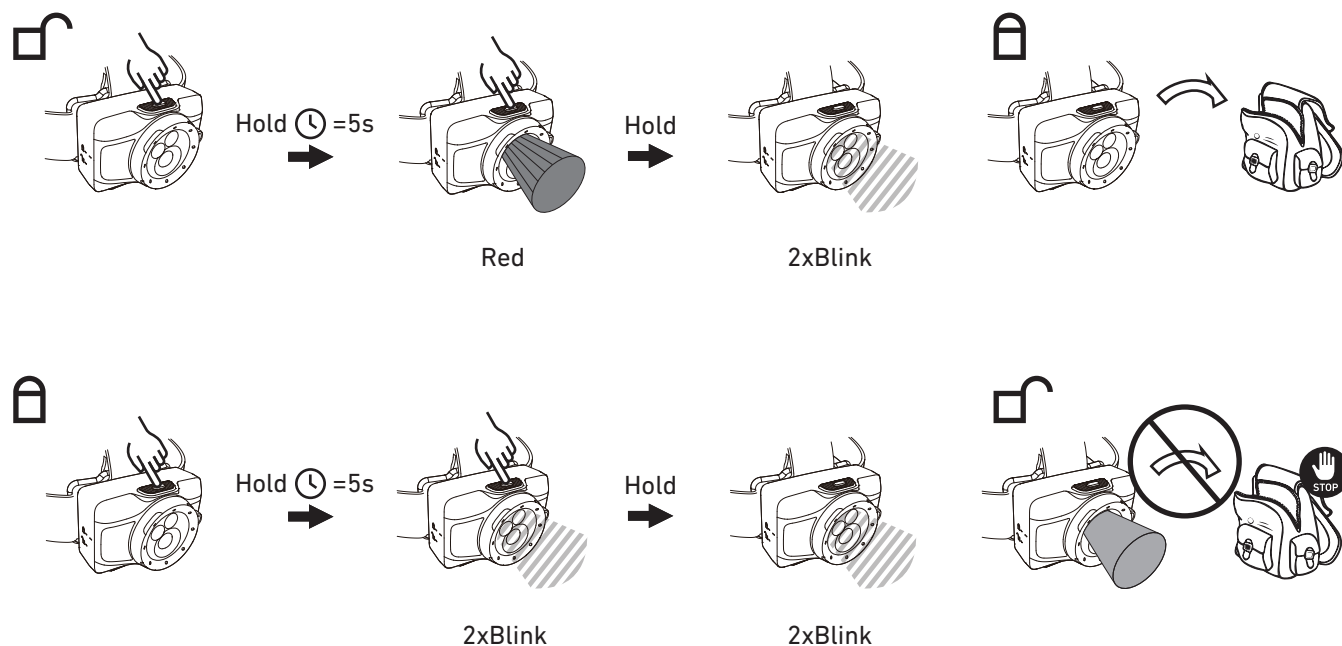



Helmet Mount (HF6R Pro)

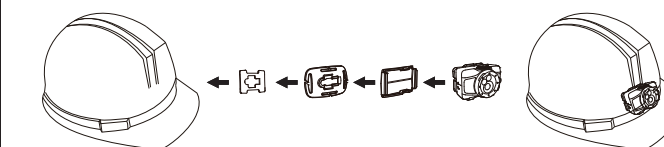



HF6R Pro




HF6R Signature




Boost

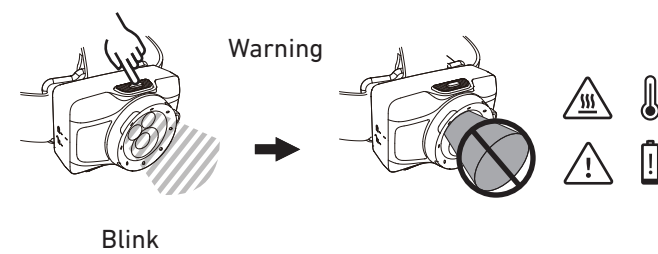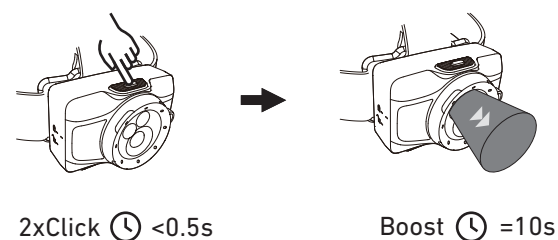


Backup Mode

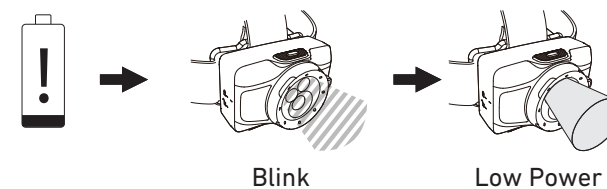



Battery Replacement

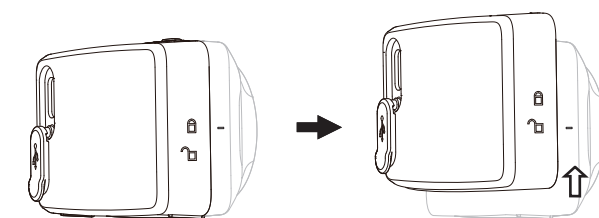

Lamp Head Rotation

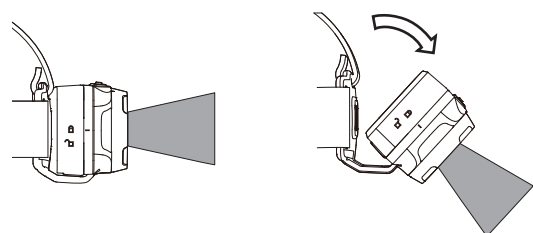

Headband Adjustment

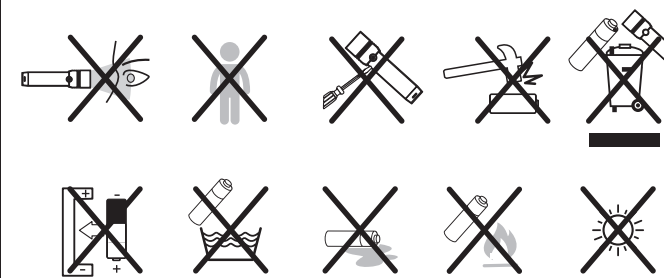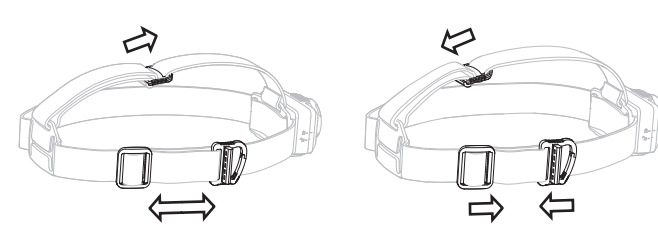

Ledlenser GmbH & Co. KG,
Kronenstr. 5-7, 42699 Solingen, Germany
Phone +49 212/5948-0 info@ledlenser.com




HF6R / HF6R Pro

○ White Mode
Default Setting

↔

● Red Mode

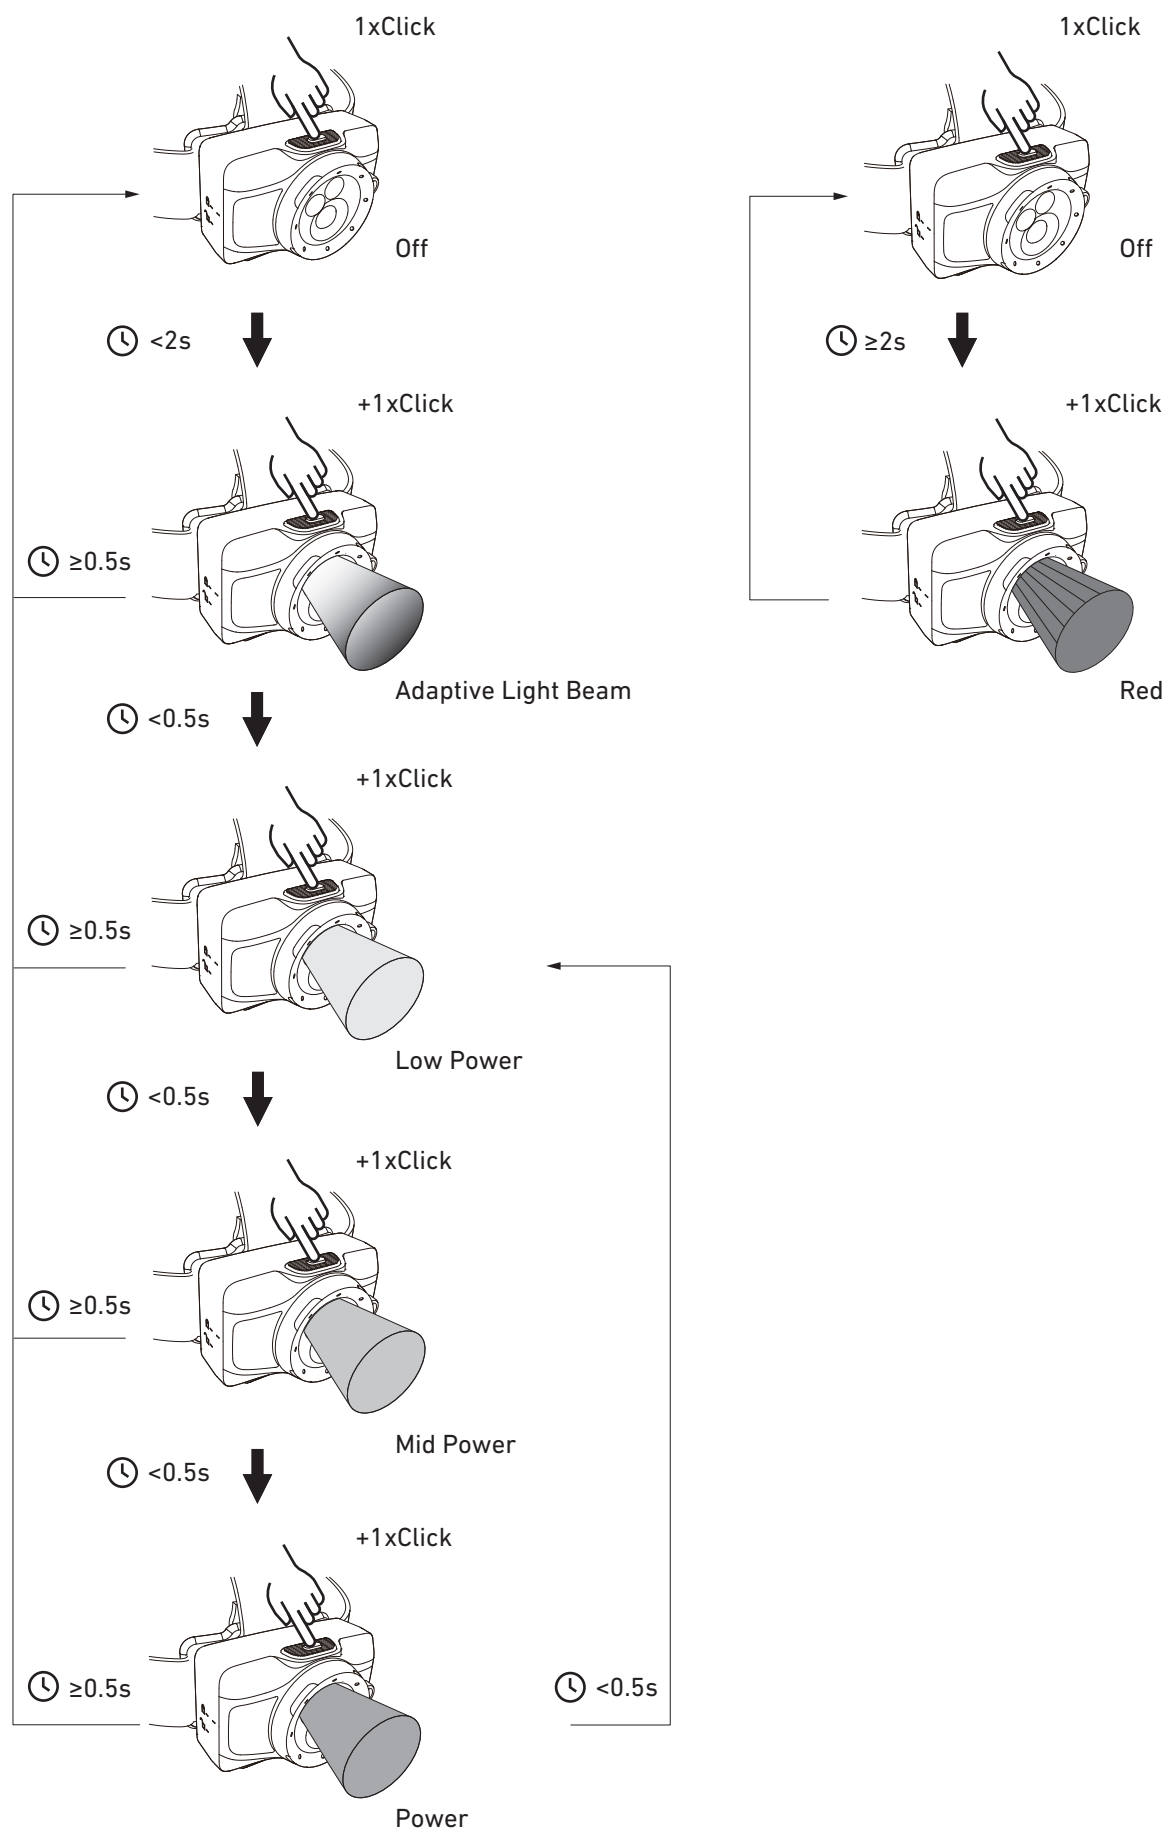

HF6R RGB / HF6R Signature

○ White Mode
Default Setting

↔

● RGB Mode

